Assembly Instructions



A046-005-001

HDPE PORCH SWING

Important - Please read these instructions fully before starting assembly

HASSLE-FREE WARRANTY

Kingyes stand behind the quality of our products. For full warranty policy, email: info@kingyesoutdoor.com

Safety & Care Advice

If you need help or have damaged or missing parts, please email: info@kingyesoutdoor.com

Important - Please read these instructions fully before starting assembly

Check you have all the components and tools listed Do not stand or put weight on the product, this could on the pages 3.

Remove all fittings from the plastic bags and separate them into their groups.

Keep children and animals away from the work area, small parts may cause choking if swallowed. fires or any other source of heat.

Make sure you have enough space to layout the parts before starting.

Assemble on a soft level surface to avoid damaging

660 LBS CAPACITY

same area) as possible.

cause damage.



Assemble the item as close to its final position (in the

Do not place furniture directly in front of radiators.

The assembly will be easier with two people while one person could also do the job.

General care & maintenance

Using damp cloth and mild detergent for routine maintenance, do not use blench or abrasive cleaners.

From time to time check that there are no loose screws on this unit.

Clean & Sanitize Tips

the unit or your floor.

Use this method for a quick clean-up here and there throughout the season — adding in the bleach solution to easily sanitize and eliminate any stubborn stains or dirt build-up from the winter months.


- Mix mild dish soap and warm water in a bucket.
- Use a clean cloth to wipe the soapy mixture onto the surfaces of your furniture, cleaning off any dirt.
- For extra cleaning power or to sanitize, mix 1/3 bleach and 2/3 water.
- Apply bleach mixture to furniture with a clean cloth and allow it to sit on the lumber for a few minutes (this will not affect the color).
- Loosen any dirt and debris that may catch in the surface grooves of the lumber by scrubbing the bleach mixture with a soft-bristle brush.
- Rinse thoroughly using a garden hose with a spray nozzle.

Components

If you need help or have damaged or missing parts, please email: info@kingyesoutdoor.com

Please check you have all the components listed below.

Note: The illustration of the chair shows the exact position of each part. Check when assembling.

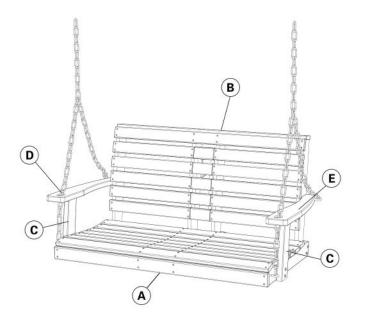

Α	P	Seat	1
В		Back	1
С		Side Frame	2
D	(50)	Right Arm	1
E	023	Left Arm	1

Hardware & Tools

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than required.


① x 4	② x 4	③ x 4	(4) x 4
		0	<u> </u>
M6 x 70MM	M6 x 60MM	M6 x 50MM	M6 x 30MM
(5) × 2 (5) × 2	6 x 2 ○ ○ ○ ○ ○ ○	7 1pc 5	8 1pc 5
M8 x 90MM	M8 x 50MM	M6 Wrench	M8 Wrench
9 1pc	① x 2		
Hex Key	Metal Chain		

Assembly Instructions

If you need help or have damaged or missing parts, Assembly Instructions please email: info@kingyesoutdoor.com

If you need help or have damaged or missing parts, please email: info@kingyesoutdoor.com

⚠ Caution: Please do not over-tighten bolts and screws during assembly. ▲ Caution: Please do not over-tighten bolts and screws during assembly.

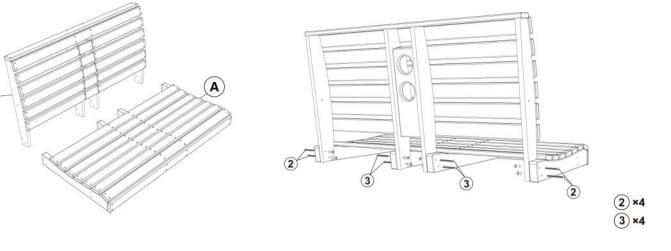


(4) ×4

• Attach "Back (B)" to "Seat (A)" - Using "2 M6 × 60MM Bolts" and "3 M6 × 50MM Bolts", tighten with hex key and wrench.

STEP 2


Attach "Side Frame (C)" to "Arms (D/E)" - Using

"4 M6 × 30MM Bolts", tighten with Hex key .

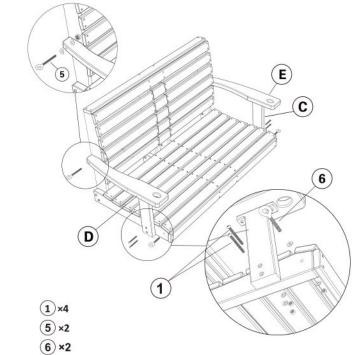

STEP 3

- Attach "Arms (D/E)" to "Back (B)" -Using "5 M8 × 90MM Bolts", tighten with
- Attach "Side Frame (C)" to "Seat (A)" -Using "1 M6 × 70MM Bolts", tighten with
- Attach "6 M8 × 50MM Bolts" to "Seat (A)", tighten with wrench.





- Attach the "Metal Chain" to the swing
- The longer chain should go through the hole on the arm, then connect the carabiner to the "6 M8 × 50MM Bolts".
- Connect the carabiner on the shorter chain to the "5 M8 × 90MM Bolts".