Assembly Instructions

If you need help or have damaged or missing parts, please email: **SERWALL@patioadirondack.com**

⚠ Caution: Please do not over-tighten bolts and screws during assembly.



STEP7

●Attach "Handrail (K)" to "Rear Leg (C/D)" - Using "ⓖM6 x 35MM Bolts" ,tighten with hex key.



STEP8

●Hang the four "Hooks (M)" onto the "Short Stretcher (H)" in front by hand.

Outdoor Dining Cart

Assembly Instructions | **A161-001-001**

SERWALL
ONE DAY , MEET YOUR ADIRONDACK



Important - Please read these instructions fully before starting assembly

HASSLE-FREE WARRANTY

Serwall stands behind the quality of our products.
For full warranty policy, email: **SERWALL@patioadirondack.com**

220 LBS CAPACITY | 1 PERSON ASSEMBLY | AROUND 20 MIN. ASSEMBLY

Safety & Care Advice

If you need help or have damaged or missing parts, please email: **SERWALL@patioadirondack.com**

Important - Please read these instructions fully before starting assembly

Check you have all the components and tools listed on the page 3.

Remove all fittings from the plastic bags and separate them into their groups.

Keep children and animals away from the work area, small parts may cause choking if swallowed.

Make sure you have enough space to layout the parts before starting.

Assemble on a soft level surface to avoid damaging the unit or your floor.

Do not stand or put weight on the product, this could cause damage.

Assemble the item as close to its final position (in the same area) as possible.

Do not place furniture directly in front of radiators, fires, or any other source of heat.

The assembly will be easier with 2 people while 1 person could also do the job.

General care & maintenance

Using damp cloth and mild detergent for routine maintenance, do not use bleach or abrasive cleaners.

From time to time check that there are no loose screws on this unit.

Clean & Sanitize Tips

Use this method for a quick clean-up here and there throughout the season — adding in the bleach solution to easily sanitize and eliminate any stubborn stains or dirt build-up from the winter months.

- Mix mild dish soap and warm water in a bucket.
- Use a clean cloth to wipe the soapy mixture onto the surfaces of your furniture, cleaning off any dirt.
- For extra cleaning power or to sanitize, mix 1/3 bleach and 2/3 water.
- Apply bleach mixture to furniture with a clean cloth and allow it to sit on the lumber for a few minutes (this will not affect the color).
- Loosen any dirt and debris that may catch in the surface grooves of the lumber by scrubbing the bleach mixture with a soft-bristle brush.
- Rinse thoroughly using a garden hose with a spray nozzle.

Components

If you need help or have damaged or missing parts, please email: **SERWALL@patioadirondack.com**

Please check you have all the components listed below.

Note: The illustration of the bench shows the exact position of each part. Check when assembling.



#		Description	Qty.
A		Table Top	1
B		Bottom Panel	1
C		Right Rear Leg	1
D		Left Rear Leg	1
E		Right Front Leg	1
F		Left Front Leg	1
G		Long Stretcher	2
H		Short Stretcher	4
I		Bottom Panel Side Rail	1
J		Wheels	2
K		Handrail	1
L		Metal Mesh Frame	2
M		Hooks	4

Hardware & Tools

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than required.

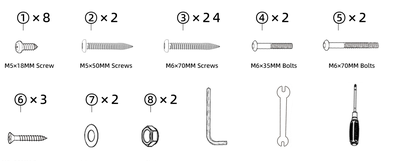

Assembly Instructions

If you need help or have damaged or missing parts, please email: **SERWALL@patioadirondack.com**

⚠ Caution: Please do not over-tighten bolts and screws during assembly.



STEP1

●Attach two "Short Stretcher (H)" to "Right Rear Leg (C)" and "Left Rear Leg (D)" to create the rear leg frame.Use "③M6 x 70MM Screws" to secure the parts and tighten with hex key.
●Repeat the process to create the front leg frame.



STEP2

●Attach the two leg frames together with "Table Top (A)" and 2 "Long Stretcher (G)" - Using "③M6 x 70MM Screws" and tighten them with hex key.



STEP3

●Attach the two "Metal Mesh Frame (L)" to "Long Stretcher (G)" - Using "③M5 x 18MM Screws" , tighten with screwdriver.

Assembly Instructions

If you need help or have damaged or missing parts, please email: **SERWALL@patioadirondack.com**

⚠ Caution: Please do not over-tighten bolts and screws during assembly.



STEP4

●Attach "Bottom Panel Side Rail (I)" to "Bottom Panel (B)" - Using 2 "②M5 x 50MM Screws" and 3 "⑥M5 x 35MM Screws" , tighten with hex key and screwdriver.



STEP5

●Attach "Bottom Panel Side Rail (I)" to "Rear Leg (C/D)" and "Front Leg (E/F)"- Using "③M6 x 70MM Screws" ,tighten with hex key.



STEP6

●Attach "Wheels (J)" to "Front Leg (E/F)" - Using "⑤M6 x 70MM Bolts" with "⑦ Washer" and "⑧Nut" , tighten with hex key and wrench.